



机框/风叶: PBT塑料


耐压: 交流500V持续1分钟,漏电源小于5毫安

绝缘度: 在引线与机框之间直流500V电压时10兆欧

工作温度: -20℃~80℃

工作湿度: 20%~85%

使用寿命(25℃时): 滚珠轴承风扇5万小时, 含油轴承风扇为3万小时

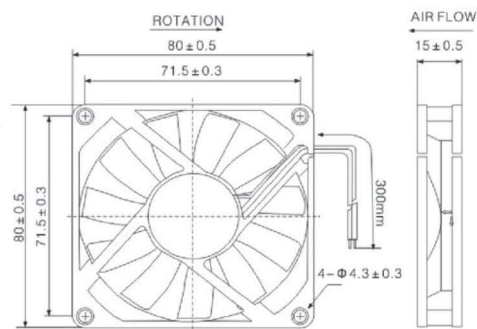

Specification

Model	Bearing	Rated voltage	Rated current	Rated input power	Nominal speed	Air flow		Air pressure		Noise	Weight
		(V)	(A)	(W)	(RPM)	(CFM)	(m³/min)	(mm/H₂O)	(inch-H₂O)	(dBA)	(g)
DF8015B(S)12H	sleeve/ball	12	0.17	2.04	8000	33.12	0.93	3.53	0.13	32.0	45
DF8015B(S)12M	sleeve/ball	12	0.14	1.68	2500	28.66	0.80	3.02	0.12	30.0	
DF8015B(S)12L	sleeve/ball	12	0.09	1.08	2000	24.80	0.68	2.51	0.09	25.0	
DF8015B(S)24H	sleeve/ball	24	0.15	3.60	3000	33.12	0.93	3.53	0.13	32.0	
DF8015B(S)24M	sleeve/ball	24	0.18	3.12	2500	28.66	0.80	3.02	0.12	30.0	
DF8015B(S)24L	sleeve/ball	24	0.10	2.40	2000	24.30	0.68	2.51	0.09	25.0	