



机框/风叶：PBT塑料


耐压：交流500V持续1分钟,漏电源小于5毫安

绝缘度：在引线与机框之间直流500V电压时10兆欧

工作温度：-20℃~80℃

工作湿度：20%~85%

使用寿命(25℃时)：滚珠轴承风扇5万小时, 含油轴承风扇为3万小时

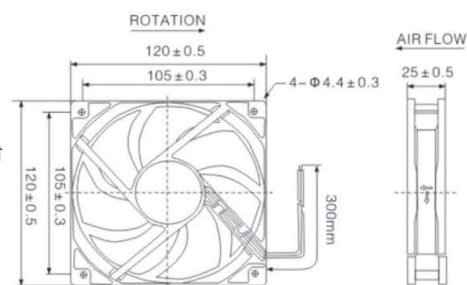

Specification

Model	Bearing	Rated voltage	Rated current	Rated input power	Nominal speed	Air flow		Air pressure		Noise	Weight
		(V)	(A)	(W)	(RPM)	(CFM)	(m³/min)	(mm/H₂O)	(inch-H₂O)	(dBA)	(g)
DF1225B(S)12D	sleeve/ball	12	0.55	6.60	3000	150.11	4.20	5.82	0.28	50.0	145
DF1225B(S)12H	sleeve/ball	12	0.4	4.80	2400	114.00	3.19	4.45	0.18	41.0	
DF1225B(S)12M	sleeve/ball	12	0.25	3.00	2000	92.52	2.59	3.68	0.14	36.0	
DF1225B(S)12L	sleeve/ball	12	0.18	2.10	1800	68.45	1.92	2.68	0.11	32.0	
DF1225B(S)24D	sleeve/ball	24	0.45	10.80	3000	150.11	4.20	5.82	0.23	50.0	
DF1225B(S)24H	sleeve/ball	24	0.35	8.40	2400	114.00	3.19	4.45	0.18	41.0	
DF1225B(S)24M	sleeve/ball	24	0.2	4.8	2000	92.52	2.59	3.68	0.14	36.0	
DF1225B(S)24L	sleeve/ball	24	0.13	3.12	1800	68.45	1.92	2.68	0.11	32.0	
DF1225B(S)48H	sleeve/ball	48	0.15	7.20	3000	133.05	3.73	5.21	0.21	45.0	
DF1225B(S)48M	sleeve/ball	48	0.10	4.80	2700	92.52	2.59	3.65	0.14	36.0	